AC Motor Brakes

F Series
- 3 Ft-Lb
- 6 Ft-Lb
- 10 Ft-Lb
- 15 Ft-Lb

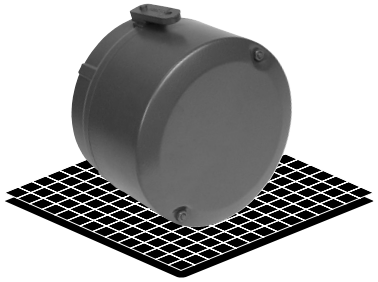

AC Rear Mounted Brake

Nema 2 Housing

- Factory Assembled and Tested
- Manual Release
- AC Power Off
- Rear Mounted
- Aluminum Head
- Steel Cover

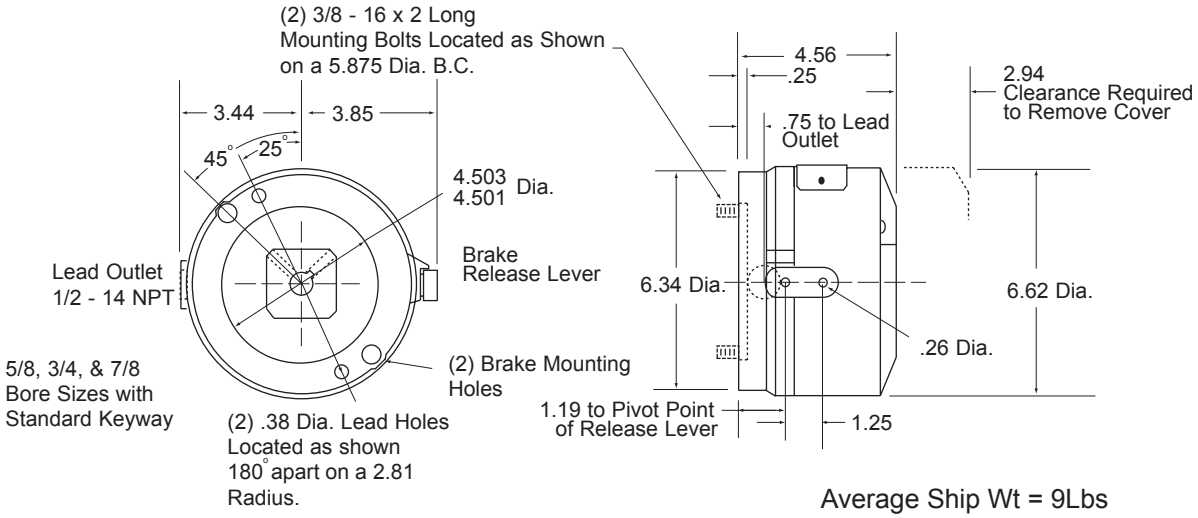

Average Ship Wt = 9Lbs

Brake Part Numbers

Coil Voltage	5/8 Bore Hub			
	3 Ft. Lb. Brakes	6 Ft. Lb. Brakes	10 Ft. Lb. Brakes	15 Ft. Lb. Brakes
115/230, 60HZ	F51A0321	F52A0621	F52A0721	F53A0821
230/460, 60 HZ	F51A0324	F52A0624	F52A0724	F53A0824
287/575, 60 HZ	F51A0325	F52A0625	F52A0725	F53A0825
115/230, 50HZ	F51A0328	F52A0628	F52A0728	F53A0828
230/460, 50 HZ	F51A0329	F52A0629	F52A0729	F53A0829

Coil Voltage	3/4 Bore Hub			
	3 Ft. Lb. Brakes	6 Ft. Lb. Brakes	10 Ft. Lb. Brakes	15 Ft. Lb. Brakes
115/230, 60HZ	F51B0321	F52B0621	F52B0721	F53B0821
230/460, 60 HZ	F51B0324	F52B0624	F52B0724	F53B0824
287/575, 60 HZ	F51B0325	F52B0625	F52B0725	F53B0825
115/230, 50HZ	F51B0328	F52B0628	F52B0728	F53B0828
230/460, 50 HZ	F51B0329	F52B0629	F52B0729	F53B0829

Coil Voltage	7/8 Bore Hub			
	3 Ft. Lb. Brakes	6 Ft. Lb. Brakes	10 Ft. Lb. Brakes	15 Ft. Lb. Brakes
115/230, 60HZ	F51C0321	F52C0621	F52C0721	F53C0821
230/460, 60 HZ	F51C0324	F52C0624	F52C0724	F53C0824
287/575, 60 HZ	F51C0325	F52C0625	F52C0725	F53C0825
115/230, 50HZ	F51C0328	F52C0628	F52C0728	F53C0828
230/460, 50 HZ	F51C0329	F52C0629	F52C0729	F53C0829

Technical Data

60 HZ Brake Coils Single Phase			50HZ Brake Coils Single Phase		
Voltage	Current Holding Amps	Current Inrush Amps	Voltage	Current Holding Amps	Current Inrush Amps
115/230	.50/.25	3.66/1.83	115/230	.45/.22	3.27/1.64
230/460	.28/.14	1.94/.97	230/460	.24/.12	1.76/.88
287/575	.22/.11	1.54/.77			

Static Torque Ft. Lb.	Number Discs
3	1
6	2
10	2
15	3