


# Ordering Information

## Spring Applied Brakes

### PART NUMBERING SYSTEM FOR PRODUCTS ON PAGES 30 TO 49 OF THIS CATALOG

(For Imperial Units)

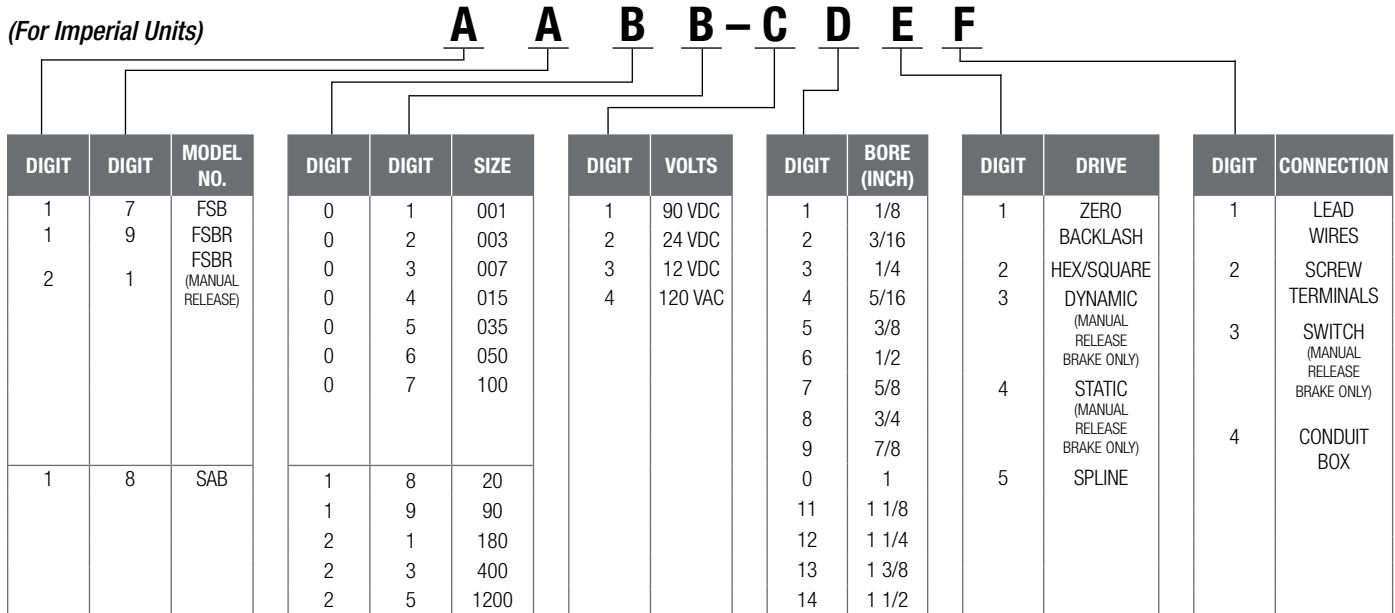

### How To Order

- A.** Select the model number from the product guide.
- B.** Select the size of the brake.
- C.** Select the voltage.
- D.** Select the bore diameter.
- E.** 1. For model FSB and SAB-20, & 90, select 2. For model FSB spring applied brakes, select 1 or 2. For manual release brakes, select 3 or 4. For SAB-180, 400, & 1200, select 5.
- F.** For all, refer to the product guide and specify 1 or 2. For manual release brakes, if a switch is desired, select 3, otherwise use a 1.

### Example (Imperial)

FSB050 brake, 24 volts, 1/2 bore, Hex drive  
Part No. 1706-2621

### Example (Metric)

FSB050 brake, 90 volts, 15mm bore, Hex drive  
Part No. M1706-2621

(For Metric Units)

